

Linear guides



TS-01



TS-11



Order key

complete system ► Page 928

Type Options

TS - 01 - 15 - 1000

Guide rails	Type 01	Installation size	Rail length [mm]
-------------	---------	-------------------	------------------



Curved rail profiles

► Page 844


Options:

TS-01: Standard rail

TS-11: Weight-reduced rail

Hard anodised surfaces

► Page 842

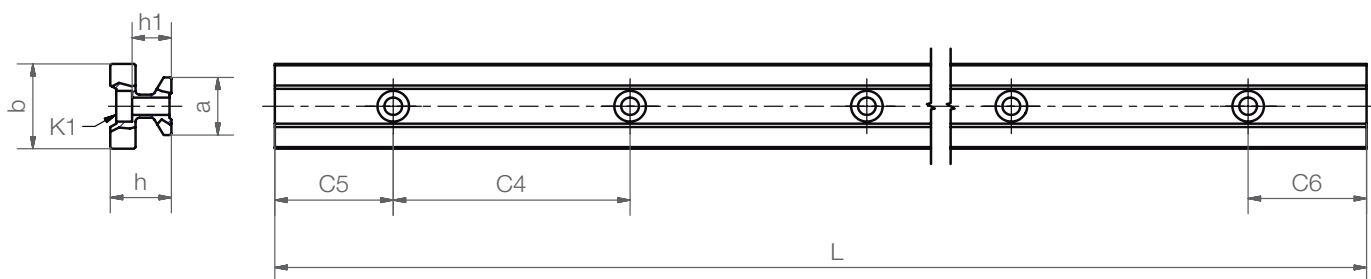

Dimensions [mm]

Part No.	Weight [kg/m]	L Max.	a -0.2	C4	C5		C6		h	h1	K1 for screw DIN 912	b	I _y [mm ⁴]	I _z [mm ⁴]	W _{by} [mm ³]	W _{bz} [mm ³]
					min.	Max.	min.	Max.								
TS-01-15	0.6	4,000	15	60	20	49.5	20	49.5	15.5	10.0	M4	22	6,440	4,290	585	488
TS-01-20	1.0	4,000	20	60	20	49.5	20	49.5	19.0	12.3	M5	31	22,570	11,520	1,456	1,067
TS-11-20	0.5	4,000	20	120	20	79.5	20	79.5	19.0	12.3	M5	31	12,140	6,360	780	620
TS-01-25	1.3	4,000	23	60	20	49.5	20	49.5	21.5	13.8	M6	34	34,700	19,300	2,041	1,608
TS-01-30	1.9	4,000	28	80	20	59.5	20	59.5	26.0	15.8	M8	40	70,040	40,780	3,502	2,832

Standard hole pattern symmetric C5 = C6

For rails without mounting holes, please use part number suffix "UNGEBOHRT"

Can be combined with:



TW-01-...



TWA-01-...



TW-01-HKA



TW-02-...



TW-03-...



Technical data

► Page 917